

# MULTI-BIOMERTIC IDENTIFICATION TERMINAL

The Intelligent Appliance for Face & Card Identification




Support Facial  
identification method  
(High Definition Infrared Camera)



3 Inch touch screen



ID Card



Network Connection



Access Control Connection  
(FA380)



- Elegant ergonomic design
- Face, RFID, PIN identification mode
- TCP/IP communication and USB Host
- 3.0 inch TFT touch screen, T9 Input, 9 Digit User ID
- Infrared optical system enables user-identification in poor light environments
- Optional Mifare card module


FA300

Distributor:



**PROFIT (OA) LTD**  
www.profitoa.com.hk

## SKETCH DIAGRAM

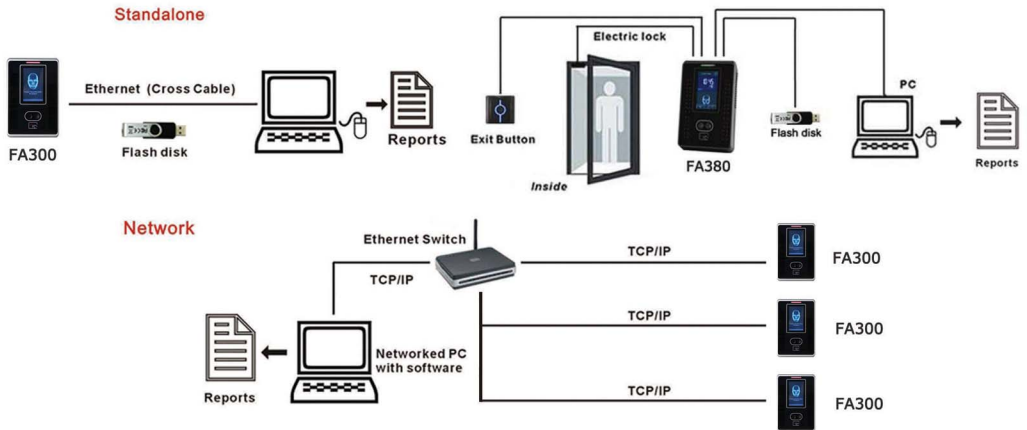

## SPECIFICATION

## FA300

### LCD Display

3 Inch Touch Screen

### Speaker

Voice prompt (language can be selected)

### Capacity

Face: 200(1:N) ID Card: 10,000 Logs: 100,000

### Verification

Verification speed (1:1) ≤ 1s

### Identification

FRR ≤ 0.01% FAR ≤ 0.0001%

### Communications

TCP/IP, USB-Host

### Algorithm Version

Face 7.0

### Image Sensor

Special Stereo Dual Sensor

### Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

### Environment

Operation temperature: 0°C-45°C

Operation humidity: 20%-80%

### Power Supply

12VDC/1.5A

### Package info.

Machine size: 10.4(L)\*16(H)\*3.6(D)cm

Unit packing:28\*23\*10cm Carton packing:50\*30\*30cm

Real weight:1.1kg

Volume weight:1.5kg

### Functions

ID Card, Automatic Switch, Self-Service Query, Work Code, T9 input, 9 Digit User ID, DLST, Schedule-bell,

### Optional Function

Mifare Card

Distributor :



**PROFIT (OA) LTD**

Tel:2782 7522 www.profitoa.com.hk